

Specification

Model#	Watts	Lumens	Size	Volts	CCT	CRI	PF	Beam angle	Dimmable
PL-4**-RPP-GX23	4W	400 lm	7"	120~277Vac	4000/5000K	>80Ra	>0.9	300°	no
PL-6**-RPP-GX23	6W	600 lm	7"	120~277Vac	4000/5000K	>80Ra	>0.9	300°	no
PL-8**-RPP-GX23	8W	800 lm	7"	120~277Vac	4000/5000K	>80Ra	>0.9	300°	no

Packing


Model#	Qty	Gross Weight	Carton Dimension	20gp qty	40hc qty
PL-***-RPP-GX23	100pcs/ctn	4.2kg / 9.24lbs	60*31*20cm / 23.6*12.2*7.87"	70000pcs	170000pcs

Dimmer Compatibility

- Robertson** SP2PW(3P10100), SP1320P(3P10050)
- Philips** LC13TP
- Keystone** CC1322MTP

Wiring Diagram

Wiring Diagram for Electronic Ballast

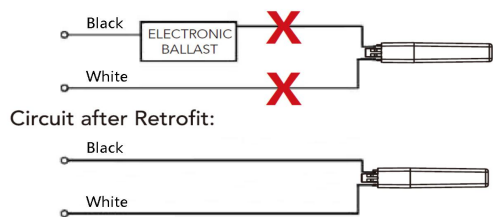

Wiring Diagram for Magnetic Ballast:

